

QuattroPod mini

無線影音商用會議簡報器



Specifications	
Video outputs	R01 - 1*HDMI
output resolution	RX: 4K out / TX: 1080p in
Number of split screens	Up to 4
Audio	Via HDMI or Bluetooth
Wireless standard	802.11ac
Connection - R01	RJ45(support PoE), USB
Connection - T02	HDMI in / USB for Mobile devices

Power - R01	DC - in 5V 2A, PoE 5V 3A
Power - T02	DC - in 5V / 0.9A
Dimensions - R01	180*80*25 mm w/o antenna
Dimensions - T02	60*60*20mm
Operation systems	Win7/8/10 and above
	Mac 10.9 and above
	iOS 9 and above
	Android 5 and above

*R01:Receiver, T02:Transmitter



耀麟國際有限公司

台南市佳里區中山路240號 電話:06-7225111



官方網站



FB



LINE@ 客服

QuattroPod mini

多台裝置透過無線投影方式共用

一個大螢幕的簡報系統。

適用於商務會議系統、大型演講會議、

展覽等演示應用。



A QuattroPod mini Set contains
1 Receiver (RX) and 2 Transmitters(TX).

商務會議不可或缺的好夥伴



QuattroPod mini 具備多對一功能，1台接收器(RX)最多能接收來自32台發送器(TX)的訊號，支援全屏/二分屏/四分屏畫面，最多4個裝置的影像內容同步顯示在大螢幕上。

跨越各大平台系統 相容性無與倫比



QuattroPod mini 支援 iOS、Android、MAC、Windows 系統，適合 PC、手機、平板... 等裝置，搭配電視、投影機進行投影，連接 QuattroPod 將畫面無線投影到大螢幕，提升會議進行效率。

一鍵投影，主從控制



不需安裝任何軟體，只需一鍵輕按發送器(TX)按鈕，投放在大螢幕簡易又迅速，有效提升會議效率。通過主從控制，使用者可以利用「側邊鍵」同意/拒絕訪客在螢幕上展示畫面。

客製化使用者介面



QuattroPod mini 可隨心所欲更改開機畫面的UI使用者介面，創造屬於使用者或公司的自我風格，迅速提升專業形象。

隨插即用暢快無阻



QuattroPod mini 操作簡單，只需透過傳輸線連接發送器與手機、平板、筆電、電腦等裝置，就可直接投影，可以避免裝載軟體的資安疑慮或是作業版本相容性問題。

無線與有線 雙管齊下更方便



QuattroPod mini 以 802.11ac Wi-Fi 5G 點對點方式無線傳輸訊號，傳輸距離最遠可達 30M，是大型會議不可或缺的利器。

連接示意圖 RX




TX接口



USB for Mobile



HDMI for PC

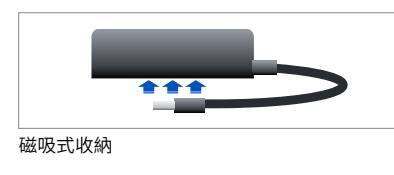

磁吸式收納